

Blue Smart Charger

IP65 The professional's choice

5
YEAR
WARRANTY



Energy. Anytime. Anywhere.

- Water, dust and chemical resistant
- Seven step smart charge algorithm
- Recovery of fully discharged 'dead' batteries
- Automatic power supply function
- Severe cold performance: down to -30°C
- Several other battery life enhancing features
- Low power mode to charge smaller batteries
- **Li-ion** battery mode
- Setup and configure, readout of voltage and current by **Bluetooth Smart**



Ph: 1300 792 997 or +61 7 3272 7999
 Fax: 1300 798 189 or +61 7 3272 7982
 sales@air-allied.com.au www.air-allied.com.au

Blue Smart IP65 Charger	12 V 4/5/7/10/15 A	24 V 5/8 A
Input voltage range	180-265 VAC	
Efficiency	94%	95%
Standby power consumption	0,5 W	
Charge voltage 'absorption'	Normal: 14,4 V High: 14,7 V Li-ion: 14,2 V	Normal: 28,8 V High: 29,4 V Li-ion: 28,4 V
Charge voltage 'float'	Normal: 13,8 V High: 13,8 V Li-ion: 13,5 V	Normal: 27,6 V High: 27,6 V Li-ion: 27,0 V
Charge voltage 'storage'	Normal: 13,2 V High: 13,2 V Li-ion: 13,5 V	Normal: 26,4 V High: 26,4 V Li-ion: 27,0 V
Charge current	4 / 5 / 7 / 10 / 15 A	5 / 8 A
Low current mode	2 / 2 / 2 / 3 / 4 A	2 / 3 A
Temperature compensation (lead-acid batteries only)	16 mV/°C	32 mV/°C
Can be used as power supply	Yes	
Back current drain	0,7 Ah/month (1 mA)	
Protection	Reverse polarity Output short circuit Over temperature	
Operating temp. range	-30 to +50°C (full rated output up to 30°C) (cables retain flexibility at low temperature)	
Humidity (non-condensing)	Max 95%	

ENCLOSURE

Battery-connection	Black and red cable of 1,5 meter with 20 A DC connector, clamps and M8 eyelets	
230 V AC-connection	Cable of 1,5 meter with CEE 7/17, BS 1363 plug (UK) or AS/NZS 3112 plug	
Protection category	IP65 (splash and dust proof)	
Weight	0,9 kg	0,9 kg
Dimensions (h x w x d)	12/7: 47x95x190mm Other: 60x105x190mm	24/5: 47x95x190mm Other: 60x105x190mm

STANDARDS

Safety	EN 60335-1, EN 60335-2-29	
Emission	EN 55014-1, EN 61000-6-3, EN 61000-3-2	
Immunity	EN 55014-2, EN 61000-6-1, EN 61000-6-2, EN 61000-3-3	


victron energy
BLUE POWER

www.victronenergy.com
 Customer support: sales@victronenergy.com

Included



Optional




Ultra high efficiency "green" battery charger

With up to 95% efficiency, these chargers generate up to four times less heat when compared to the industry standard. And once the battery is fully charged, power consumption reduces to 0,5 Watt, some five to ten times better than the industry standard.

Durable, safe and silent

- Low thermal stress on the electronic components.
- Protection against ingress of dust, water and chemicals.
- Protection against overheating: the output current will reduce as temperature increases up to 60°C, but the charger will not fail.
- The chargers are totally silent: no cooling fan or any other moving parts.

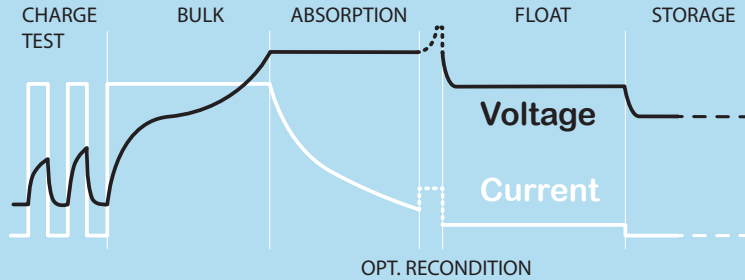

Reconditioning

A lead-acid battery that has been insufficiently charged or has been left discharged during days or weeks will deteriorate due to sulfation. If caught in time, sulfation can sometimes be partially reversed by charging the battery with low current up to a higher voltage.

Recovery function for fully discharged batteries

Most reverse polarity protected chargers will not recognize, and therefore not recharge a battery which has been discharged to zero or nearly zero Volts. The **Blue Smart Charger** however will attempt to recharge a fully discharged battery with low current and resume normal charging once sufficient voltage has developed across the battery terminals.




Ph: 1300 792 997 or +61 7 3272 7999
 Fax: 1300 798 189 or +61 7 3272 7982
 sales@air-allied.com.au www.air-allied.com.au

The VictronConnect app

Setup, readout and configure your **Blue Smart IP65 Charger** via your smartphone.

You can display the status of your charger and battery and even control the functions of your charger using the VictronConnect app. On your screen the readout of voltage and current is default available.

Download your app for iOS and Android here at <https://www.victronenergy.com/live/victronconnect>

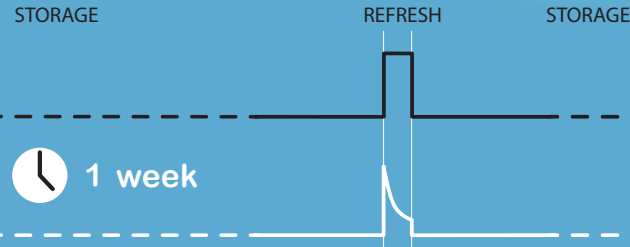

Storage mode: less corrosion of the positive plates

Even the lower float charge voltage that follows the absorption period will cause grid corrosion. It is therefore essential to reduce the charge voltage even further when the battery remains connected to the charger during more than 48 hours.

Temperature compensated charging

The optimal charge voltage of a lead-acid battery varies inversely with temperature. **The Blue Smart IP65 Charger** measures ambient temperature during the test phase and compensates for temperature during the charge process. The temperature is measured again when the charger is in low current mode during float or storage. Special settings for a cold or hot environment are therefore not needed.

Li-ion battery mode

The **Blue Smart Charger** uses a specific charging algorithm for Li-ion (LiFePO₄) batteries, with automatic Li-ion under voltage protection reset.



IP65 - Charger Guide

Blue Smart IP65 Charger

Battery size Ah	12V			24V			Your IP65 Charger »	CLASSIC	MODERN	CLASSIC	MODERN	CLASSIC	MODERN
	4 & 5 A 20 - 50 Ah	7 A 20 - 70 Ah	10 A 30 - 100 Ah	15 A 50 - 150 Ah	5 A 20 - 50 Ah	8 A 30 - 80 Ah							
12/5	12/5	12/7	12/10	12/15	24/5	24/8	OK	OK	OK	OK	OK	OK	OK
12/5	12/5	12/7	12/10	12/15	24/5	24/8	OK	OK	OK	OK	OK	OK	OK
12/5	12/5	12/7	12/10	12/15	24/5	24/8	OK	OK	OK	OK	OK	OK	OK
12/5	12/5	12/7	12/10	12/15	24/5	24/8	OK	OK	OK	OK	OK	OK	OK
12/5	12/5	12/7	12/10	12/15	24/5	24/8	OK	OK	OK	OK	OK	OK	OK
12/5	12/5	12/7	12/10	12/15	24/5	24/8	OK	OK	OK	OK	OK	OK	OK
12/5	12/5	12/7	12/10	12/15	24/5	24/8	OK	OK	OK	OK	OK	OK	OK
12/5	12/5	12/7	12/10	12/15	24/5	24/8	OK	OK	OK	OK	OK	OK	OK
12/5	12/5	12/7	12/10	12/15	24/5	24/8	OK	OK	OK	OK	OK	OK	OK

Recommended

This is the best charger for this type of battery. The battery will be charged in the most efficient way.

OK

This charger can be used for this battery. It is possible that it takes longer to charge the battery than using a recommended charger.