





HFC-16D C/N

Specifications:

- Available Seals:
 - **BF750** (Fuel, Oil, Hydraulics, Thermooil), **Perlast** (Fuel, Thermooil), **EPDM** (Water, Thermooil)
- Operating Pressure:
 - **24bar** maximum
- Operating Temperature:
 - **0°C – 210°C**
- Flow Cross-Section:
 - **361mm²**
- Maximum Pressure While Disconnecting:
 - **0bar**
- Service Life:
 - **200x** coupling cycles/ 8.000km
- Weight:
 - Coupler: **263g**
 - Nipple: **103g**
 - The couplings can be fully customized to achieve a perfect fit into your system to gain optimum weight benefits and to save space.
 - Note that the drybreaks are also available made from PEEK to save weight!

To ensure a perfect and flawless coupling process always actuate the couplings by **pushing/ pulling on the couplings**, **not on the hose** or something similar!

HFC-16D N

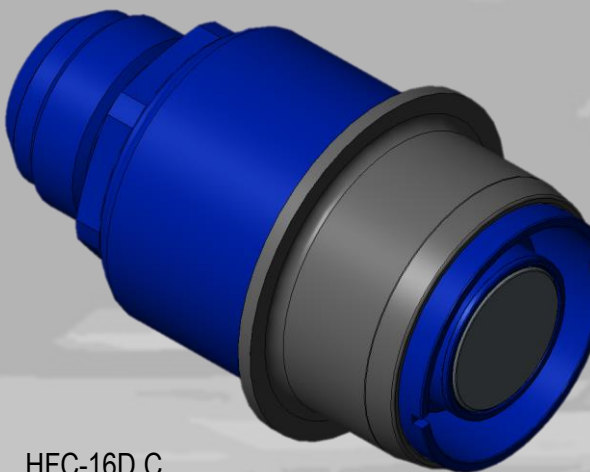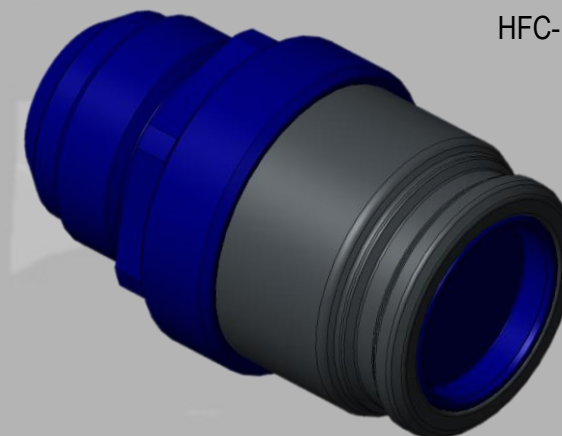

HFC-16D C

— STRICTLY CONFIDENTIAL —