

STP 19(3/4")-25(1")-32(1-1/4")

PNEUMATIC SEALER FOR STEEL STRAP WITH SEAL

FLAT AND ROUND SURFACE — USING WITH TENSIONERS MODEL STTR / STTMR

TECHNICAL DATA / APPLICATIONS :

Easy use pneumatic sealer, strong and reliable to use in industrial applications. The sealer group could be turned to have ergonomic and comfortable use, also for small space conditions. Available standard in three sizes: 19mm(3/4"), 25mm(1") and 32mm(1-1/4").

Package type	Flat, round and irregular surfaces
Strap quality	Bright — Blue — High tensile
Strap Width	From 19 up to 32mm (3/4"- 1-1/4")
Strap thickness	From 0,6 to 1,1mm (0.024" - 0.043") Rmax 850N/mm2 From 0.63 to 0.9mm (0.025"—0.035") Rmax 1100N/mm2
Air pressure	From 5 to 6,5 bar MAX
Air consumption	3 l/s
Weight	3,8 Kg
Seal type	Seal—single notch
Seal type	Overlap min. 45mm length (1.75")
Order codes STP19 ; STP25 ; STP32	103.190.050 ; 103.250.050 ; 103.320.050



- * EASY TO USE
- * MODERN DESIGN
- * LIGHT AND COMPACT
- * ERGONOMIC

* NEWS:

- * NEW MORE LONG SEALING GROUP TO SEAL IN ALL CONDITIONS




STP 19(3/4")-25(1")-32(1-1/4")

- NO ADJUSTING TO USE
- EASY TURNABLE SEALING GROUP




THE SEALING GROUP CAN TURN 45° E 90°

USE THESE SCREWS TO TURN THE SEALING GROUP

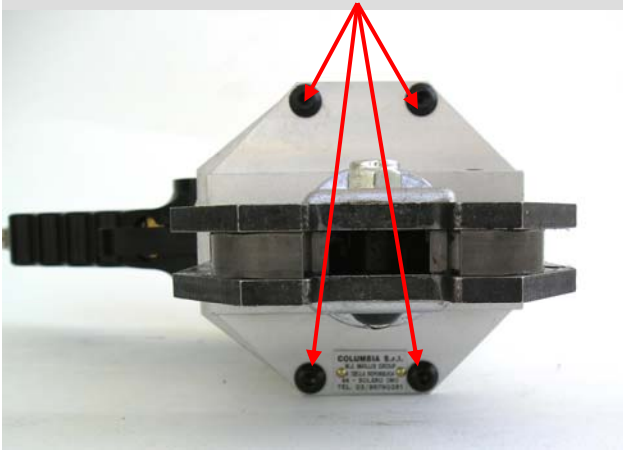

IS ALSO POSSIBLE TO INSTALL SILENCERS ON AIR OUTLETS – CODE 509005290 (OPTIONAL)

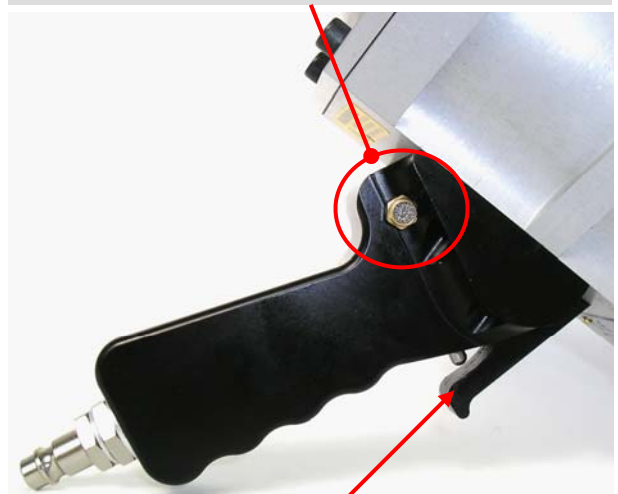

SEALING LEVER



IS ALSO POSSIBLE TO USE SIMULTANEOUSLY THE SEALER AND THE TENSIONER MODEL STTR

STP 19(3/4")-25(1")-32(1-1/4")

TYPICAL APPLICATIONS



- * MECHANICAL INDUSTRIES
- * CARPENTRY
- * IRON BANDS, COILS, PIPES
- * METALLURGY
- * WOOD




**IS ALSO
 POSSIBLE
 TO DO TWO
 NOTCHES**



SAMPLE OF COMBINATION STP + STTR



SAMPLE OF COMBINATION STP + STTRM

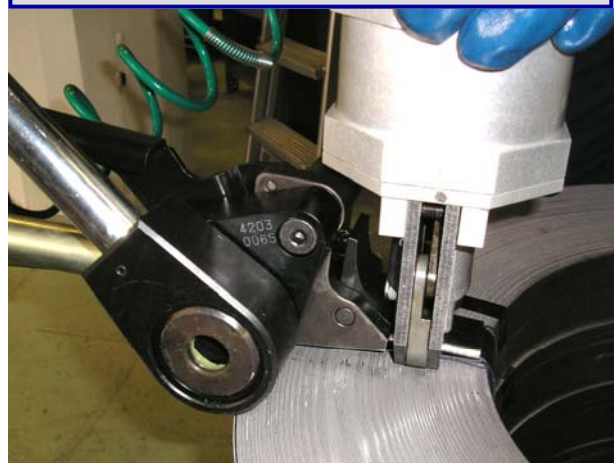

ACCESSORIES

- FILTER + LUBRIFICATOR + PRESSURE ADJ GROUP CODE 601.010.830
- SPIRAL LONG PIPE MT.15 WITH AIR CONNECTIONS ON TIPS CODE 281.218.300

ALL SPECIFICATIONS ARE CORRECT AT TIME OF PRINT, ARE FOR GUIDANCE PURPOSE ONLY AND SUBJECT TO CHANGE WITHOUT PRIOR NOTICE —09/04