



RAPIDCUT PNEUMATIC CUTTERS

Cut steel bar, rebar, and steel mesh with ease! **Made in Spain**

Rapidcut pneumatic cutters are lightweight and easy to handle. They require minimal maintenance, reducing down time and making them a very cost-effective tool in demanding applications.

RAPIDCUT-12 *

TOTAL WEIGHT	10.0 Kg.
DIMENSIONS	640 mm long x 250 mm high
CUTTING RANGE	Maximum 12mm Ø in steel up to 70 Kg./mm ² Maximum 8mm Ø in steel up to 180 Kg./mm ²
CUTTING VELOCITY	20 cuts per minute
AIR PRESSURE NEEDED	90 - 120 PSI (6—8.5 Bar)
AIR CONSUMPTION	Approx: 24 litres/cut at 7 Bar



RAPIDCUT-12L *

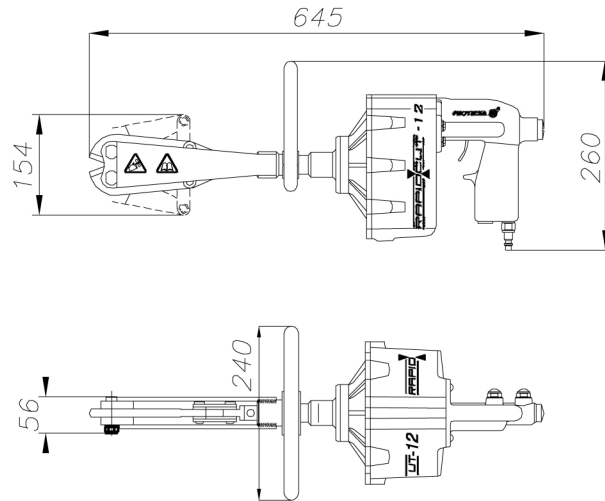
TOTAL WEIGHT	12.0 Kg.
DIMENSIONS	940 mm long x 250mm high
CUTTING RANGE	Maximum 12mm Ø in steel up to 70 Kg./mm ² Maximum 8mm Ø in steel up to 180 Kg./mm ²
CUTTING VELOCITY	20 cuts per minute
AIR PRESSURE NEEDED	90 - 120 PSI (6—8.5 Bar)
AIR CONSUMPTION	Approx: 24 litres/cut at 7 Bar




*** Rapidcut 12 Series Cutters are fitted with 1260TM cutter heads, which suits rebar and mesh to 686 Mpa (70kg/mm²) yield strength. Typical rebar and mesh sold in Australia is rated at 500Mpa. Please contact your rebar/mesh supplier if in doubt. 1280TM, 1260AS and 1280TS cutter heads are available from stock to fit existing cutters.**














RAPIDCUT-12



RAPIDCUT-12L

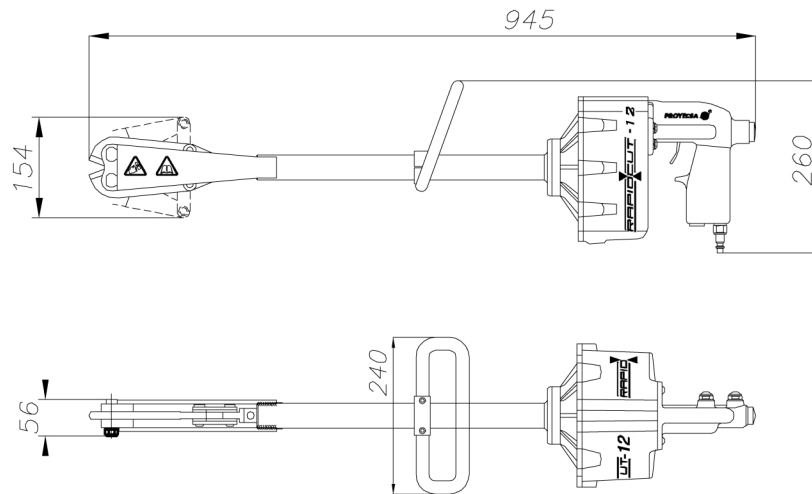

BLADE APPLICATION TABLE

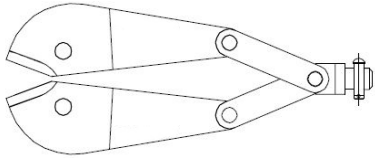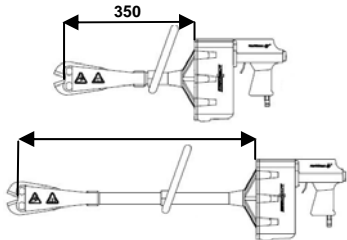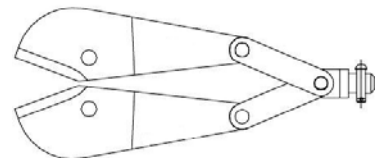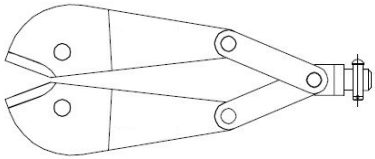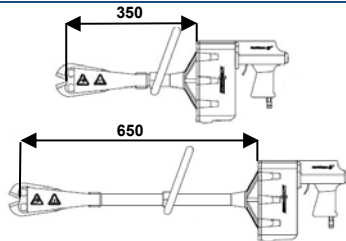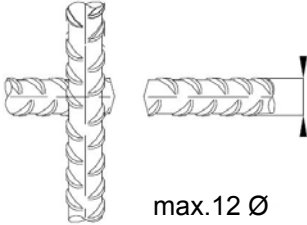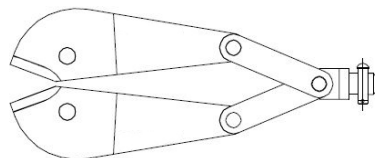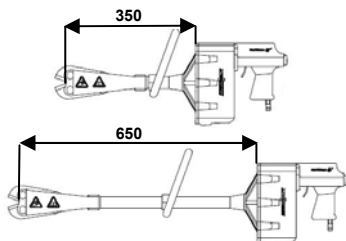HIGH TENSILE WIRE	APPROPRIATE BLADES	PNEUMATIC CUTTER MOD:
 <p>8 Ø 180 Kg./mm²</p>	 <p>Ref: 1280TM</p>	 <p>350 12 12L</p>
PRESTRESSING STRAND	APPROPRIATE BLADES	PNEUMATIC CUTTER MOD:
 <p>Ø 12.5 Ø 1/2" (7 x 4 Ø) max. 180 Kg./mm²</p>	 <p>Ref: 1280TS</p>	 <p>350 12 650 12L</p>
REBAR AND WIRE MESH	APPROPRIATE BLADES	PNEUMATIC CUTTER MOD:
 <p>max. 12 Ø max. 70 Kg./mm²</p>	 <p>Ref: 1260TM</p>	 <p>350 12 650 12L</p>
 <p>max. 12 Ø max. 70 Kg./mm²</p>	 <p>Ref: 1260AS</p>	 <p>350 12 650 12L</p>