

RAPIDCUT



RAPIDCUT PNEUMATIC CUTTERS

Cut steel bar, rebar, and steel mesh with ease! **Made in Spain**

Rapidcut pneumatic cutters are lightweight and easy to handle. They require minimal maintenance, reducing down time and making them a very cost-effective tool in demanding applications.

RAPIDCUT-16 *


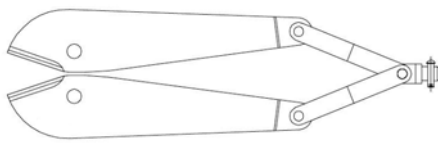
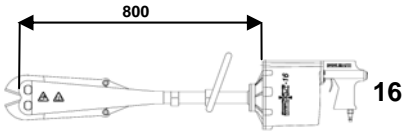

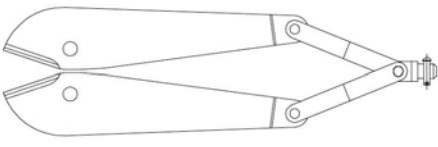
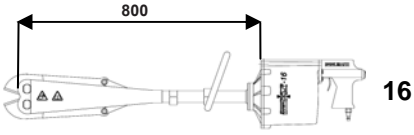
TOTAL WEIGHT	18.0 Kg.
DIMENSIONS	1164 mm long x 264mm high
CUTTING RANGE	Maximum 16mm Ø in steel up to 70 Kg./mm ² Maximum 115.5mm Ø in steel up to 180 Kg./mm ²
CUTTING VELOCITY	10 cuts per minute
AIR PRESSURE NEEDED	90 - 120 PSI (6–8.5 Bar)
AIR CONSUMPTION	Approx: 48 litres/cut at 7 Bar



*** Rapidcut 16 Series Cutters are fitted with 1660J cutter heads, which suits rebar and mesh to 686 Mpa (70kg/mm²) yield strength. Typical rebar and mesh sold in Australia is rated at 500Mpa. Please contact your rebar/mesh supplier if in doubt.
1680R cutter heads are available from stock to fit existing cutters.**



BLADE APPLICATION TABLE

PRESTRESSING STRAND	APPROPRIATE BLADES	PNEUMATIC CUTTER MOD:
 <p>15.8 Ø 5/8" (7 x 5 Ø) max. 180 Kg./mm²</p>	 <p>Ref: 1680R</p>	 <p>800 16</p>
REBAR AND WIRE MESH	APPROPRIATE BLADES	PNEUMATIC CUTTER MOD:
 <p>max. 16 Ø max. 70 Kg./mm²</p>	 <p>Ref: 1660J</p>	 <p>800 16</p>