



RAPIDCUT PNEUMATIC CUTTERS

Cut steel bar, rebar, and steel mesh with ease! **Made in Spain**

Rapidcut pneumatic cutters are lightweight and easy to handle. They require minimal maintenance, reducing down time and making them a very cost-effective tool in demanding applications.

RAPIDCUT-6 *

TOTAL WEIGHT	3.2 Kg.
DIMENSIONS	448 mm long x 196 mm high
CUTTING RANGE	Maximum 4 mm Ø in steel up to 180 Kg./mm ² Maximum 6 mm Ø in steel up to 70 Kg./mm ²
CUTTING VELOCITY	60 cuts per minute
AIR PRESSURE NEEDED	90 - 120 PSI (6—8.5 Bar)
AIR CONSUMPTION	Approx: 3.78 litres/cut at 7 Bar



RAPIDCUT-6L *

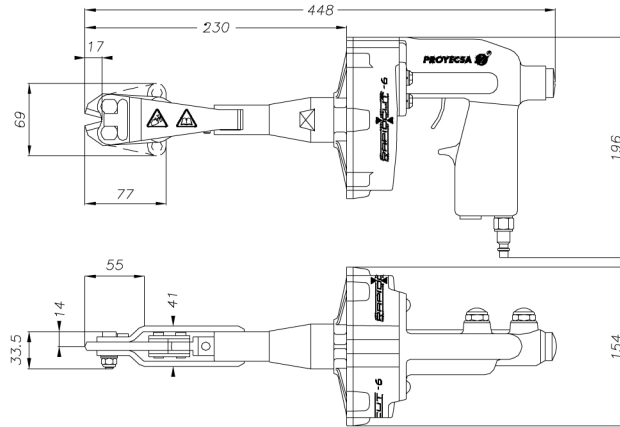
TOTAL WEIGHT	5.5 Kg.
DIMENSIONS	898 mm long x 196 mm high
CUTTING RANGE	Maximum 4mm Ø in steel up to 180 Kg./mm ² Maximum 6mm Ø in steel up to 70 Kg./mm ²
CUTTING VELOCITY	60 cuts per minute
AIR PRESSURE NEEDED	90 - 120 PSI (6—8.5 Bar)
AIR CONSUMPTION	Approx: 3.78 litres/cut at 7 Bar



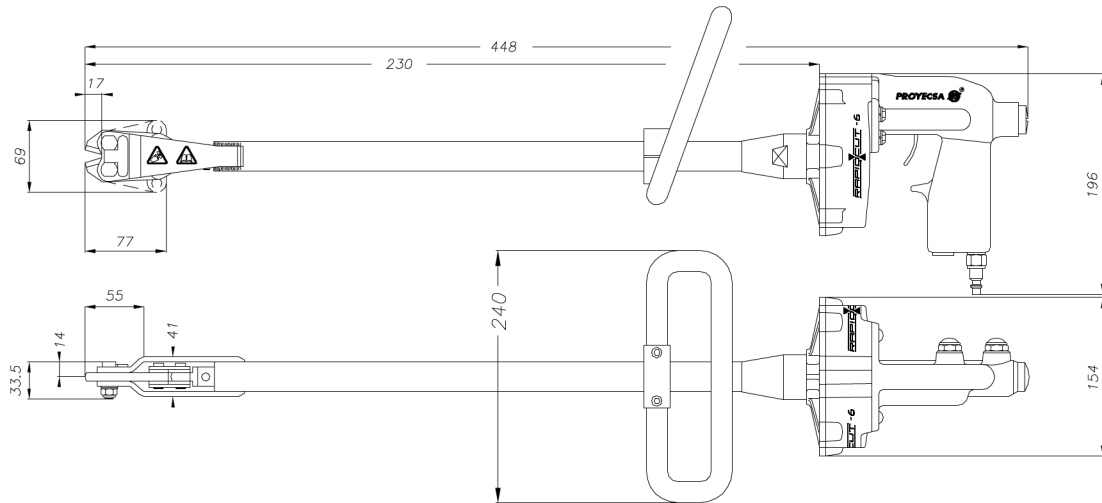
*** Rapidcut 6 Series Cutters are fitted with C80LAP cutter heads, which suits rebar and mesh to 686 Mpa (70kg/mm²) yield strength. Typical rebar and mesh sold in Australia Australia is rated at 500Mpa. Please contact your rebar/mesh supplier if in doubt. C80LAP cutter heads are available from stock to fit existing cutters.**




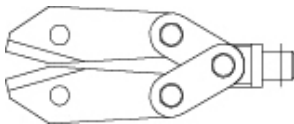
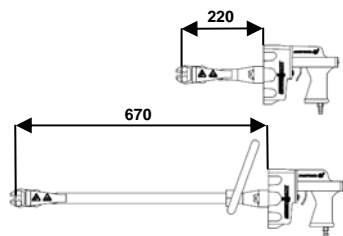
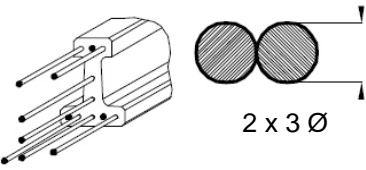
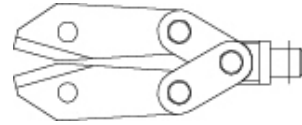
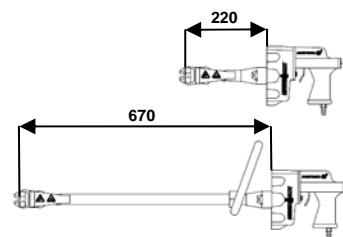

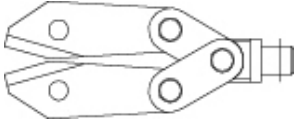
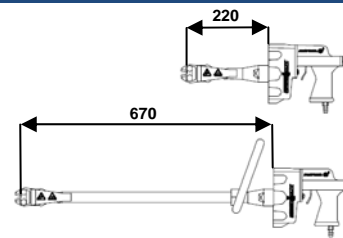

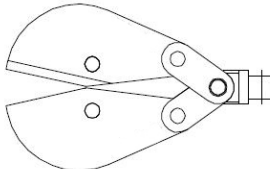
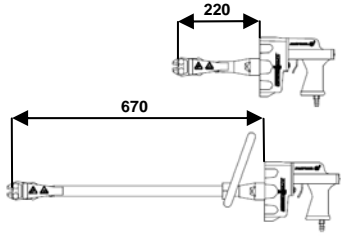
RAPIDCUT - 6



RAPIDCUT - 6L



BLADE APPLICATION TABLE

HIGH TENSILE WIRE	APPROPRIATE BLADES	PNEUMATIC CUTTER MOD:
 <p>4 Ø max. 180 Kg./mm²</p>	 <p>Ref: C80LAP</p>	 <p>6 6L</p>
 <p>2 x 3 Ø max. 180 Kg./mm²</p>	 <p>Ref: C80LAP</p>	 <p>6 6L</p>
REBAR AND WIRE MESH	APPROPRIATE BLADES	PNEUMATIC CUTTER MOD:
 <p>6 Ø max. 70 Kg./mm²</p>	 <p>Ref: C80LAP</p>	 <p>6 6L</p>
DIFFERENT KIND OF MATERIAL	APPROPRIATE BLADES	PNEUMATIC CUTTER MOD:
 <p>max. 13.4 Ø max. 1 x 35 mm² Copper wire with insulated housing.</p>	 <p>Ref: L60C</p>	 <p>6 6L</p>