



## **RAPIDCUT PNEUMATIC CUTTERS**

Cut steel bar, rebar, and steel mesh with ease! **Made in Spain**

**Rapidcut pneumatic cutters are lightweight and easy to handle. They require minimal maintenance, reducing down time and making them a very cost-effective tool in demanding applications.**

### **RAPIDCUT-8 \***

TOTAL WEIGHT	5.8 Kg.
DIMENSIONS	500 mm long x 250 mm high
CUTTING RANGE	Maximum 5 mm Ø in steel up to 180 Kg./mm <sup>2</sup> Maximum 8 mm Ø in steel up to 70 Kg./mm <sup>2</sup>
CUTTING VELOCITY	60 cuts per minute
AIR PRESSURE NEEDED	90 - 120 PSI (6–8.5 Bar)
AIR CONSUMPTION	Approx: 7 litres/cut at 7 Bar



### **RAPIDCUT-8L \***

TOTAL WEIGHT	7.2 Kg.
DIMENSIONS	805 mm long x 250 mm high
CUTTING RANGE	Maximum 5mm Ø in steel up to 180 Kg./mm <sup>2</sup> Maximum 8mm Ø in steel up to 70 Kg./mm <sup>2</sup>
CUTTING VELOCITY	60 cuts per minute
AIR PRESSURE NEEDED	90 - 120 PSI (6–8.5 Bar)
AIR CONSUMPTION	Approx: 7 litres/cut at 7 Bar



### **RAPIDCUT-8XL \***

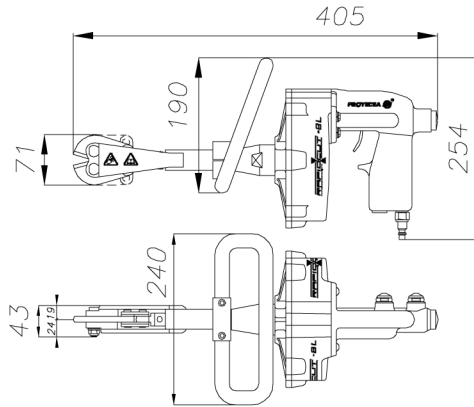
TOTAL WEIGHT	8.7 Kg.
DIMENSIONS	1100mm long x 250 mm high
CUTTING RANGE	Maximum 5mm Ø in steel up to 180 Kg./mm <sup>2</sup> Maximum 8mm Ø in steel up to 70 Kg./mm <sup>2</sup>
CUTTING VELOCITY	60 cuts per minute
AIR PRESSURE NEEDED	90 - 120 PSI (6–8.5 Bar)
AIR CONSUMPTION	Approx: 7 litres/cut at 7 Bar



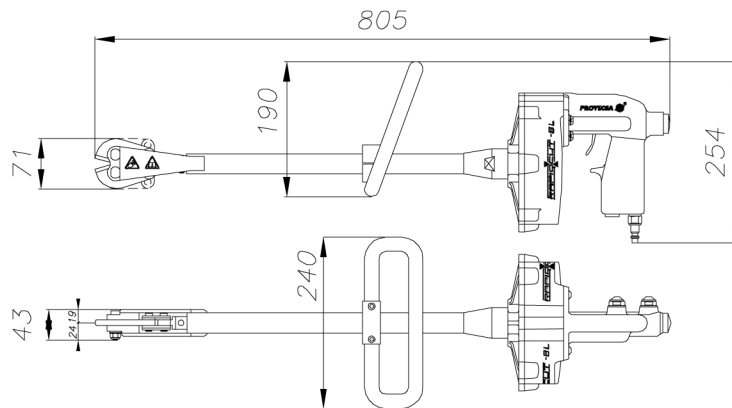
**\* Rapidcut 8 Series Cutters are fitted with M60L cutter heads, which suits rebar and mesh to 686 Mpa (70kg/mm<sup>2</sup>) yield strength. Typical rebar and mesh sold in Australia is rated at 500Mpa. Please contact your rebar/mesh supplier if in doubt. M80L cutter heads are available from stock to fit existing cutters.**



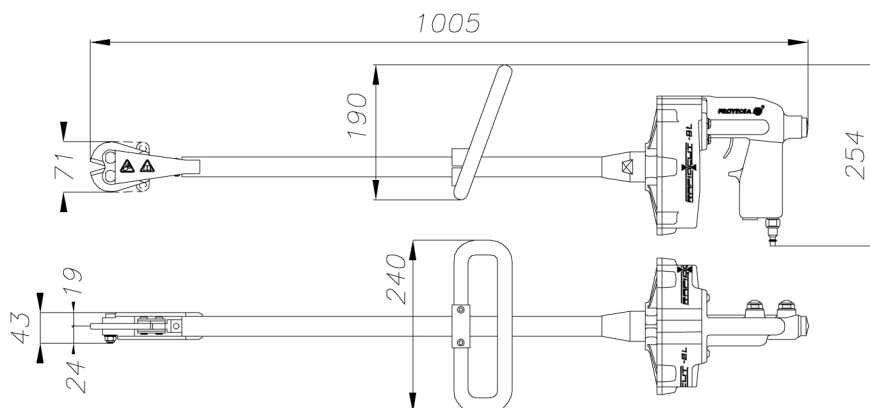
### RAPIDCUT -8




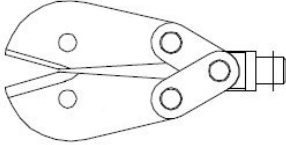
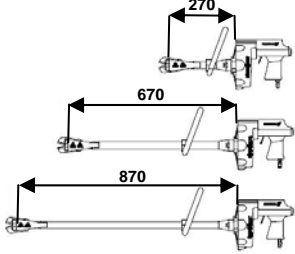
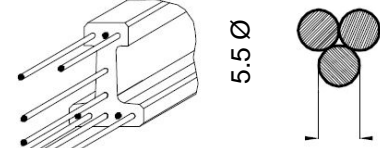
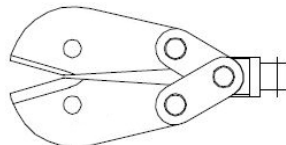
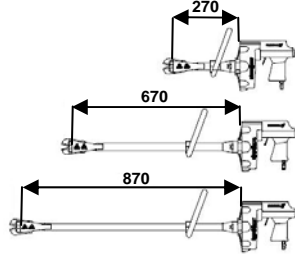

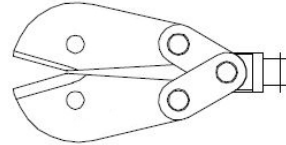
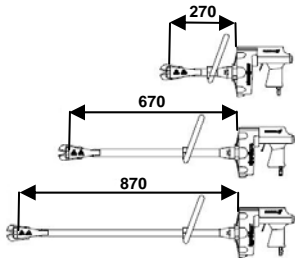
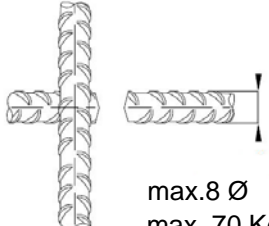
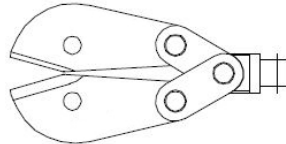
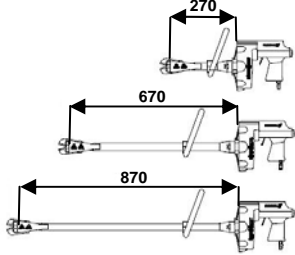
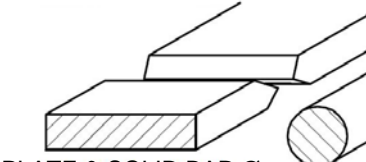
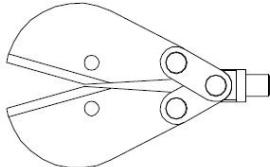
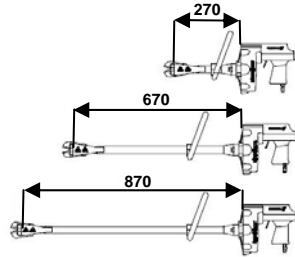
### RAPIDCUT -8L



### RAPIDCUT -8XL



## BLADE APPLICATION TABLE

HIGH TENSILE WIRE	APPROPRIATE BLADES	PNEUMATIC CUTTER MOD:
 <p>max. 180 Kg./mm<sup>2</sup></p>	 <p>Ref: <b>M60L</b></p>	 <p>8 8L 8XL</p>
 <p>max. 180 Kg./mm<sup>2</sup></p>	 <p>Ref: <b>M60L</b></p>	 <p>8 8L 8XL</p>
REBAR AND WIRE MESH	APPROPRIATE BLADES	PNEUMATIC CUTTER MOD:
 <p>max. 70 Kg./mm<sup>2</sup></p>	 <p>Ref: <b>M60L</b></p>	 <p>8 8L 8XL</p>
REBAR AND WIRE MESH	APPROPRIATE BLADES	PNEUMATIC CUTTER MOD:
 <p>max. 8 Ø max. 70 Kg./mm<sup>2</sup></p>	 <p>Ref: <b>M60AS</b></p>	 <p>8 8L 8XL</p>
DIFFERENT KIND OF MATERIAL	APPROPRIATE BLADES	PNEUMATIC CUTTER MOD:
 <p>PLATE &amp; SOLID BAR Ø Materials: copper &amp; aluminium max.10 Ø      max. 25 x 6</p>	 <p>Ref: <b>L60L</b></p>	 <p>8 8L 8XL</p>