


## SUPERGOMAS160 TAPPING MACHINE GUN

**Brand: Ober**

**Product Code: 8306049**

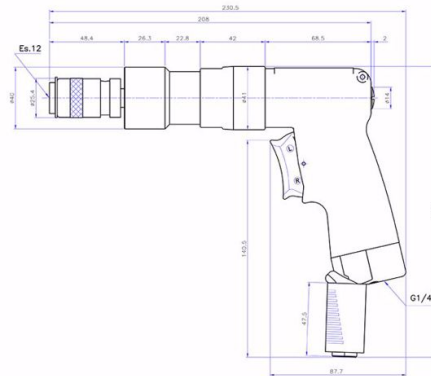

\* Tap Holder available as an optional extra  
\*\* Refer to Technical Documents for size selection

### SUPERGOMAS160 TAPPING MACHINE GUN

Industrial 16mm capacity pistol grip pneumatic tapper c/w quick release chuck and side handle. This product features an advanced ergonomic design, silenced handle exhaust, high reliability and durability, coupled with speed and precision making this the tool of choice for many users.

Our specifically selected tapping tools will increase productivity in any sector of industry. They are widely used in the mechanical engineering and woodworking industries for operations such as tapping blind and through holes, cleaning threads after painting and mounting inserts and stud bolts.

Based on a pivoting reversing trigger mechanism, the direction of rotation is quick and easy. This model is activated via the forward/reverse "pivoting" trigger. This tool comes as standard with the B-12 (7620005.1) Quick Release Chuck.

We have a large selection of "Tap Retainers" to accept varying sizes of taps used throughout industry. Please refer to the PDF guide under "Technical Documents" to selecting the correct sized retainer. These retainers fit inside the quick release chuck.

Other models available have an automatic, push-pull reversing action. Please review our catalogue, and as always, if you cannot find what you are looking for, simply contact us, we are here to help!

#### Attachments

[Tap Holder Selection Guide](#)

#### Specifications

|                       |                           |
|-----------------------|---------------------------|
| Capacity              | 16 mm (Steel)             |
| Chuck Type            | B12                       |
| Diameter Outside (od) | 40 mm Body (Gear Section) |
| Hose Size I.D         | 12 mm                     |
| Length                | 208 mm                    |
| Power                 | 440 Watt                  |
| Sound Pressure        | 80 dB(A)                  |
| Speed (no load)       | 310 rpm                   |
| Torque                | 40 Nm (29.5 ft/lbs)       |
| Weight                | 1.15 kg                   |