Air & Allied Sales (Pacific) Pty Ltd

23 Precision Street
Salisbury QLD 4107

+617 3272 7999
sales@air-allied.com.au

PUSH TROLLEY 5.0T (100-305MM)

Brand: Austlift **Product Code: 131025**

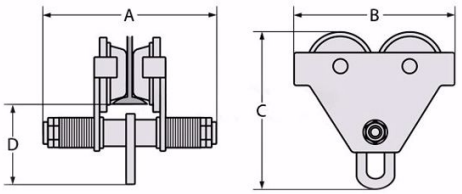

PUSH TROLLEY 5.0T (100-305MM)

This 5T Austlift Plain Trolley is moved by pushing the load lifted by the trolley, running along a flange of a monorail. A main shaft with spacers you can adjust the width of UB/UC beam. They are widely used in Factories, Mines, Wharves, Docks,Warehouses and Engineering Workshops for installation of equipment in places where no power supply is available.

Features:
* High quality sealed ball bearings.
* Identification tag with serial number.
* Proof tested to 2 x WLL with certificate.
* Fitted with anti-drop plates for safety.
* Low headroom by design.
* Complies to AS1418.2.

Specifications

Beam Flange Width	100 - 305 mm
Body Material	Steel
Dimension A	444 mm
Dimension B	366 mm
Dimension C	334 mm
Dimension D	177 mm
Min. Radius of Curve	1.3 m
Weight	36.3 kg
WLL	5,000 kg (5.0T)

Data contained in this document is copyright of Air & Allied (Pacific) Sales Pty Ltd, and as such cannot be reproduced or redistributed, in part or whole, without the expressed permission of Air & Allied (Pacific) Sales Pty Ltd. Errors and Omissions Excepted.